






ISSUE	DESCRIPTION	DWN	DATE	APPROVEN
R1.0	First issue	Ding	2024/01/01	JIM.KING

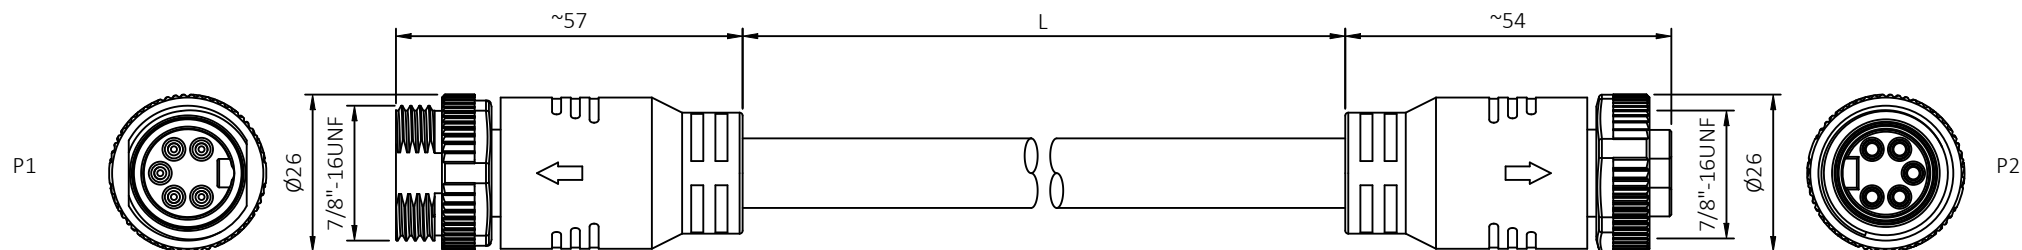

General Specifications:
 Connector 1: 7/8"-16UNF 5P Female
 Connector 2: 7/8"-16UNF 5P Male
 Locking: Screw Connection
 Termination: Solder Cup



P1	Wire List	P2
PIN 1	Drain	PIN 1
PIN 2	Red	PIN 2
PIN 3	Black	PIN 3
PIN 4	White	PIN 4
PIN 5	Blue	PIN 5



Electrical:
 Rated Voltage: 300V AC/DC
 Rated Current: 8A
 Contact Resistance: ≤5mΩ
 Insulation Resistance: ≥100MΩ

Mechanical:
 Mating Cycles: min 500
 Temperature Range: -25 to 80° C
 Degree of Protection: IP67

Material:
 Coupling nut/screw: Zinc Alloy, Electroless Nickel
 Insulator: TPU black
 Contacts: Brass, Gold Plated
 Seal: Rubber, black
 Body Molding: PVC, Yellow
 CAN-BUS Cable: (18#*1P+AL)+(16#*1P+AL)+Drain+AL+Braid , PUR jacket Grey

-TOLERANCES- UNLESS OTHERWISE SPECIFIED	RENHOTEC GROUP				
			PART DESCRIPTION: 7/8" 5P Male to Female		
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.25mm 30 - 120mm ± 0.30mm	Appr:	JIM.KING	P/N: RHT-634-3396		
	Check:		Date	Scale	Unit
	Draw:	DING	2024.01.01	Free	MM
			Type	Page	
			Z	1/1	